





ISO 9001 國際品質認證
ISO 9001 CERTIFICATE

松暉電機工業股份有限公司
SONG HUEI ELECTRIC CO., LTD.
佛山市松暉電機科技有限公司
FOSHAN SONG HUEI ELECTRIC CO., LTD.

一般事項 General	
使用溫度範圍 Operating temperature	-10 °C ~ +70 °C
儲存溫度 Storage temperature range	-30 °C ~ +80 °C
手工焊接 Manual soldering	300 °C max 3 sec
電氣特性 Electrical Characteristics	
總阻值 (R) Total resistance	10 KΩ
總阻值容許誤差 Total resistance tolerance	± 20 %
阻值線性 Resistance taper	B Taper
摺動雜音 Sliding noise	Less than 100 mV
定格電力 Rated power (W)	0.0125 W
額定電壓 Rated voltage (V)	$E = \sqrt{P * R}$ E: Rated voltage 額定電壓 (V) P: Power rating 額定電力 (W) R: Nominal total resistance 公稱全阻抗值 (Ω) 當額定電壓超過最高使用電壓的時候，最高使用電壓即為額定電壓。 When the rated voltage exceeds the maximum operating voltage, the maximum operating voltage shall be the rated voltage.
最高使用電壓 Max. operating voltage	AC 50V or DC 5.0 V
絕緣阻抗 Insulation resistance	More than 100 MΩ (100 MΩ 以上)
耐電壓 Withstand voltage	1 minute at AC 250 V
機械特性 Mechanical Characteristics	
滑動行程 Lever travel	2 mm (單方向 Single direction)
作動力 Operating force	50 ~ 180 gf.cm
推拉強度 Push-pull strength	2 Kgf max 3 sec
工作壽命 Operating life	100,000 cycles

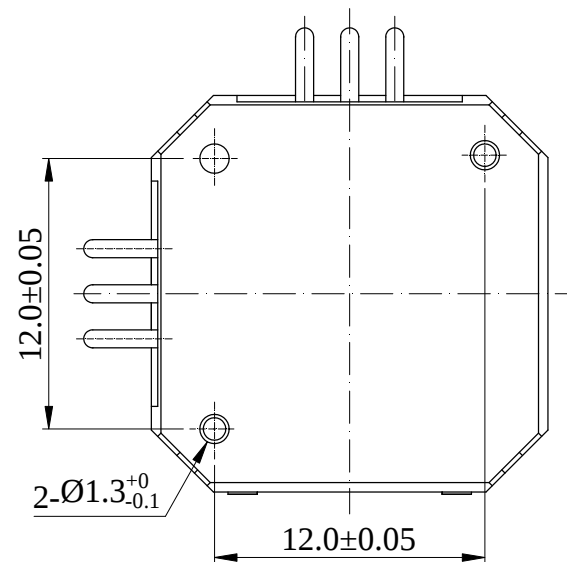

Non notation tolerance	
< 10	± 0.3
10 ~ 100	± 0.5
> 100	± 0.8

Approval		Checked		Projected		UNIT	mm	SCALE	2.5:1				
						VERSION	1.1	DATE	2016.11.11		圖元整理	何鴻根	2018.12.26
						DRAWING NO.	SS-072			ISSUE	SUBJECT	NAME	DATE
										RECORD			